

FKHL Series Wide Parallel Grippers

NEW PRODUCT



Features

1. Grippers have compact design and are ideal for various-sized workpieces.
2. Dual piston mechanism delivers high grip force.
3. Fingers are synchronized by a rack & pinion mechanism.
4. Oil impregnated sleeve bearings encased in steel are used for all shafts.
5. Rod scraper for dust protection is built in.
6. Magnetic piston is standard feature.
7. Adding optional sensors enables "open" and "close" position sensing.
8. Gripper body is hard coated aluminum ensuring abrasion and corrosion resistance.
9. No extra lubrication required.

How to Order

FKHL - **16** **D** **1**

Series Bore size Action Symbol code for total stroke (mm)

Wide opening type

Symbol	ø10	ø16	ø20	ø25	ø32
Leave blank	20	30	40	50	70
1	40	60	80	100	120
2	60	80	100	120	160

D Double acting

Example: FKHL-16D1 is 16mm bore double acting 60mm total stroke.

Price list

Model	Price	Model	Price
FKHL-10D	\$ 163.35	FKHL-25D	\$ 241.70
FKHL-10D1	178.35	FKHL-25D1	271.70
FKHL-10D2	180.00	FKHL-25D2	283.35
FKHL-16D	176.70	FKHL-32D	330.00
FKHL-16D1	191.70	FKHL-32D1	365.00
FKHL-16D2	200.00	FKHL-32D2	401.70
FKHL-20D	211.70		
FKHL-20D1	235.00		
FKHL-20D2	246.70		

Specifications

Bore size (mm)	ø10	ø16	ø20	ø25	ø32
Media	Compressed air				
Action	Double acting				
Min. operating pressure	25 psi	15 psi			
Max. operating pressure	0.6 MPa (87 psi)				
Ambient & media temperature	-10°C(14°F) ~ +60°C(140°F)				
Lubrication	None required or use ISO VG32				
Repeatability	±0.2 mm				
*Effective gripping force (lbf)	3.1	10.1	16.6	29.4	51.2

Position Sensors

*Note: Shortest stroke model, 72 psi and gripping point for ø10, ø16, ø20, ø25 = 40mm; ø32 = 80mm

9G49 style sensors
Prewired models are furnished with a 9 foot leadwire.

***Quick disconnect sensors** are supplied with male connector on a 6 inch pigtail.


Female Cord Sets	Part No.	Price
1 Meter	CFC-1M	\$14.35
2 Meters	CFC-2M	16.05
5 Meters	CFC-5M	20.30

9G49 Sensor List Prices & Selection Guide				
6.3 mm wide	Sensor Type	Electrical Characteristics		
	Reed (LED)	5-120 VDC/VAC, 0.03 Amp max, 0.005 AMP min, 4 Watt max., 2.0 voltage drop	9G49-000-002\$14.00	9G49-000-302\$16.50
	Electronic (LED)	Sourcing PNP 5-28 VDC, 0.20 Amp max current, 0.5 voltage drop	9G49-000-03127.45	9G49-000-33129.95
	Electronic (LED)	Sinking NPN 5-28 VDC, 0.20 Amp max current, 0.5 voltage drop	9G49-000-03227.45	9G49-000-33229.95
		Prewired 9 ft. Leadwire Part No.	Quick Disconnect* Part No.	

FKHL Series

Wide Parallel Grippers


Gripping Point

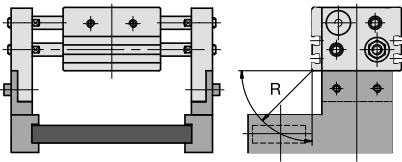

R = Holding position (mm)
 0.2 MPa = 29 psi
 0.3 MPa = 43 psi
 0.4 MPa = 58 psi
 0.5 MPa = 72 psi
 0.6 MPa = 87 psi


- Make sure that the workpiece gripping point distance is within the range of the gripping force lines indicated by each pressure in the effective gripping force graph.
- If it is used in an area in which the workpiece gripping point distance is longer than the length indicated in the diagram, the load that will be applied to the fingers or the guide will become excessively unbalanced. As a result, the fingers could become loosened and adversely affect the service life of the unit.

Effective Gripping Force



The holding force shown in the tables represents the holding force of one finger when all fingers and attachments are in contact with the workpiece, F = one finger thrust.

Model/Stroke










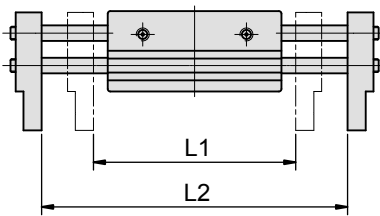


Model	Bore size (mm)	Max cycle speed (CPM)	Open/close stroke L2-L1(mm)	Width when closed (mm) L1	Width when open (mm) L2	Weight g (lb)
FKHL-10D	10	60	20	56	76	280 (0.61)
FKHL-10D1			40	78	118	345 (0.76)
FKHL-10D2			60	96	156	425 (0.94)
FKHL-16D	16	60	30	68	98	585 (1.29)
FKHL-16D1			60	110	170	795 (1.75)
FKHL-16D2			80	130	210	935 (2.06)
FKHL-20D	20	60	40	82	122	1025 (2.26)
FKHL-20D1			80	142	222	1495 (3.30)
FKHL-20D2			100	162	262	1690 (3.73)
FKHL-25D	25	60	50	100	150	1690 (3.73)
FKHL-25D1			100	182	282	2560 (5.64)
FKHL-25D2			120	200	320	2775 (6.12)
FKHL-32D	32	30	70	150	220	2905 (6.41)
FKHL-32D1			120	198	318	3820 (8.42)
FKHL-32D2			160	242	402	4655 (10.3)


Note: The open and close time spans represent the value when the exterior of the workpiece is being held.

Specifications and prices subject to change without notice or incurring obligation.

Sizing Charts

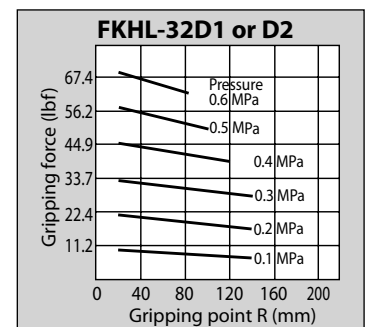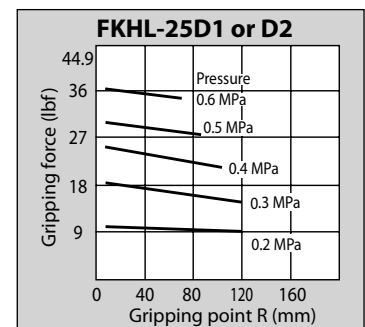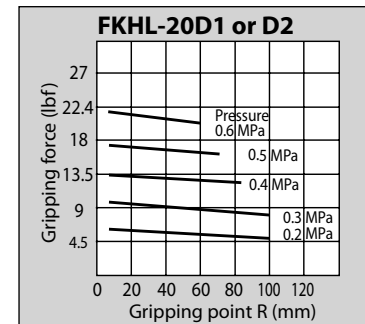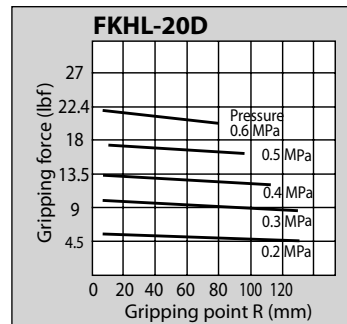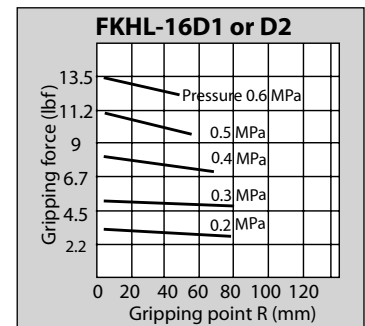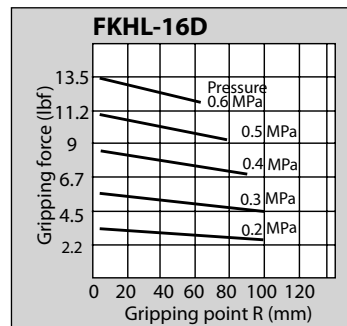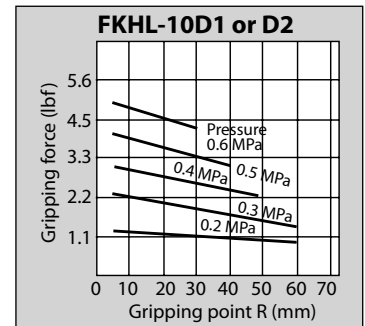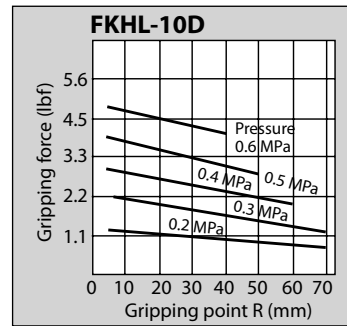


FKHL25

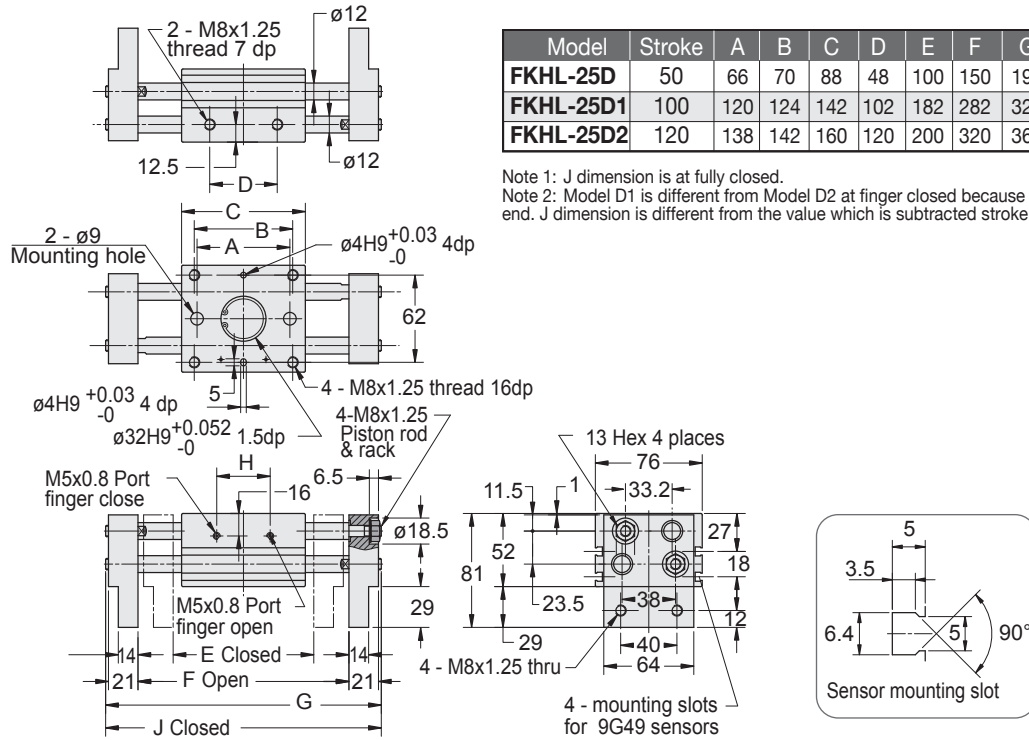

Model	Stroke	A	B	C	D	E	F	G	H	J
FKHL-25D	50	66	70	88	48	100	150	196	38	146
FKHL-25D1	100	120	124	142	102	182	282	328	86	244
FKHL-25D2	120	138	142	160	120	200	320	366	104	282

Note 1: J dimension is at fully closed.
 Note 2: Model D1 is different from Model D2 at finger closed because shaft projects from finger end. J dimension is different from the value which is subtracted stroke from G dimension.

FKHL32

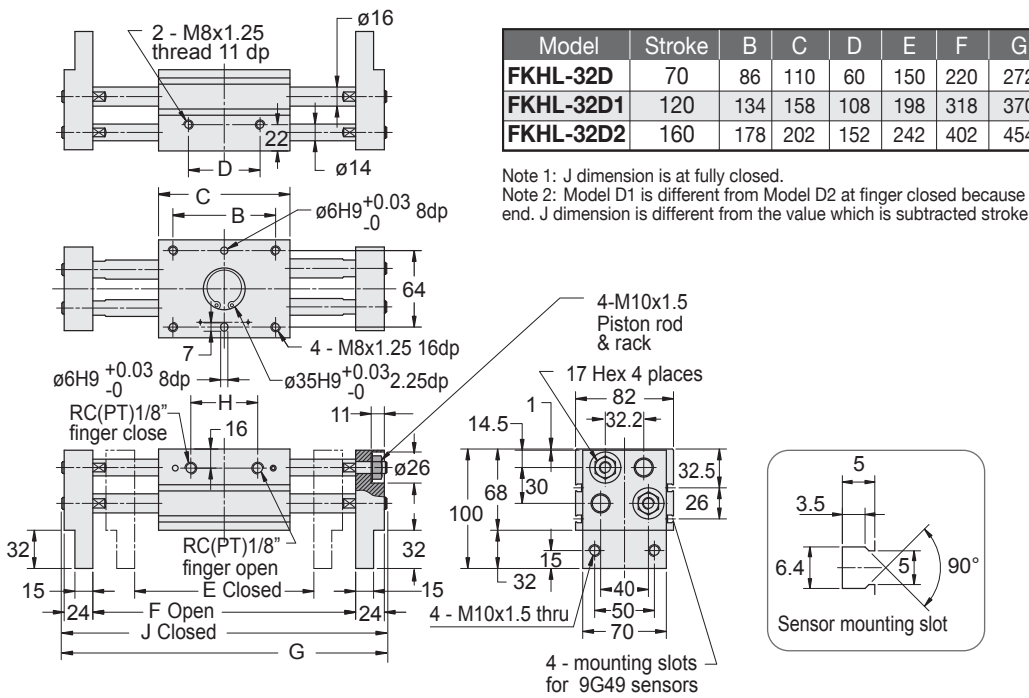

Model	Stroke	B	C	D	E	F	G	H	J
FKHL-32D	70	86	110	60	150	220	272	56	202
FKHL-32D1	120	134	158	108	198	318	370	104	282
FKHL-32D2	160	178	202	152	242	402	454	148	366

Note 1: J dimension is at fully closed.
 Note 2: Model D1 is different from Model D2 at finger closed because shaft projects from finger end. J dimension is different from the value which is subtracted stroke from G dimension.