

# FDXS Series TWIN-ROD CYLINDER

**NEW  
PRODUCT**

## Features

1. Magnetic piston is standard in all sizes.
2. Non-rotating design enables precision positioning.
3. Compact design saves space.
4. Suitable for multi-axis assemblies and design of robot arms.
5. Twin bore doubles thrust forces.
6. Easily adjustable sensors mount in linear slots in the housing.
7. Cylinders can be operated with or without lubrication.



## Specifications

100 psi max.

Model	FDXSM	FDXSL
Bearing type	Sleeve bearing	Ball bearing (Same dimensions for both)
Action	Double acting	
Bore Size	ø10, ø16, ø20, ø25, ø32	
Media	Compressed air	
Min. operating pressure	ø10 ~ ø16: 0.1 MPa (1.0 kgf/cm <sup>2</sup> ) 15 psi ø20 ~ ø32: 0.05 MPa (0.51 kgf/cm <sup>2</sup> ) 8 psi	
Max. operating pressure 100psi	0.7 MPa (7 kgf/cm <sup>2</sup> ) 100 psi	
Piston speed	ø10 ~ ø20: 30 ~ 700mm/s (27.6 in/s) ø25 ~ ø32: 30 ~ 600mm/s (23.6 in/s)	
Ambient & media temperature	-10°C(14°F) ~ +60°C(140°F) filtered dry air required at temperatures below 0°C (32°F)	
Lubrication	None required, or ISO VG32	
Port size	• ø10 ~ ø20: M5x0.8 • ø25- ø32: Rc(PT) 1/8"	
Adjustable retract stroke	0 ~ 5mm	
Cushion	Standard with rubber bumper (both sides)	

### Conversions

psi = kgf/cm<sup>2</sup> x 14.2  
psi = MPa x 145  
inch = mm x 0.0394  
lb force = N x 0.22

## Theoretical Output N (lbf)

\* Theoretical output: (N)=Pressure (MPa) X Piston area (mm<sup>2</sup>)

Bore size (mm)	Rod size (mm)	Operating direction	Piston area mm <sup>2</sup> (in <sup>2</sup> )	Operating pressure MPa (psi)						
				0.1(14.5)	0.2(29)	0.3(43)	0.4(58)	0.5(72)	0.6(87)	0.7(101)
FDXS □ 10	6	Push	157(0.24)	15.7(3.5)	31.4(7)	47.1(10)	62.8(14)	78.5(17)	94.2(21)	110(24)
		Pull	100(0.15)	10.0(2.2)	20.0(4.3)	30.0(6.4)	40.0(8.7)	50.0(10)	60.0(13)	70.0(15)
FDXS □ 16	8	Push	402(0.62)	40.2(9.0)	80.4(18)	120.6(26)	161(36)	201(44)	241(54)	281(62)
		Pull	301(0.46)	30.1(6.7)	60.2(13)	90.3(19)	120(26)	150(33)	181(40)	211(46)
FDXS □ 20	10	Push	628(0.97)	62.8(14)	126(28)	188(41)	251(56)	314(70)	377(84)	440(98)
		Pull	471(0.73)	47.1(10.6)	94.2(21)	141(31)	188(42)	236(52)	283(63)	330(73)
FDXS □ 25	12	Push	982(1.52)	98.2(22)	196(44)	295(65)	393(88)	491(109)	589(132)	687(153)
		Pull	756(1.17)	75.6(17)	151(34)	227(50)	302(68)	378(84)	454(101)	529(118)
FDXS □ 32	16	Push	1608(2.49)	161(36)	322(72)	482(107)	643(144)	804(179)	965(216)	1126(251)
		Pull	1206(1.87)	120(27)	241(54)	362(80)	482(108)	603(134)	724(162)	844(189)


Specifications and prices subject to change without notice or incurring obligation.

Fabco-Air, Inc. ■ 3716 N.E. 49th Avenue ■ Gainesville, FL 32609-1699  
 ■ Telephone (352) 373-3578 ■ Fax (352) 375-8024 ■ E-Mail service@fabco-air.com  
 ■ Web Site <http://www.fabco-air.com>


# TWIN-ROD CYLINDER

## Construction


### FDXSM / FDXSL 10

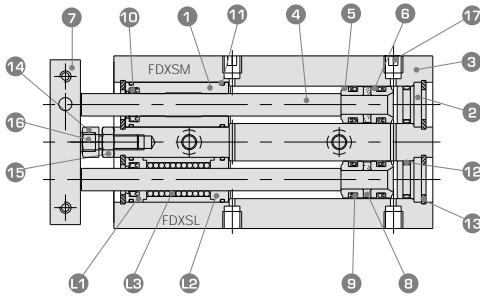

### FDXSM / FDXSL 16 - 25

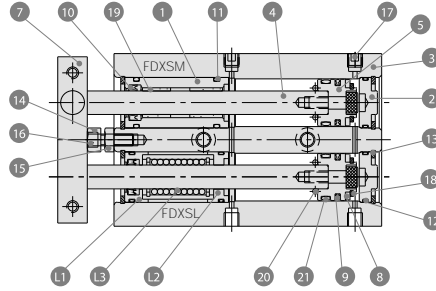

### FDXSM / FDXSL 32

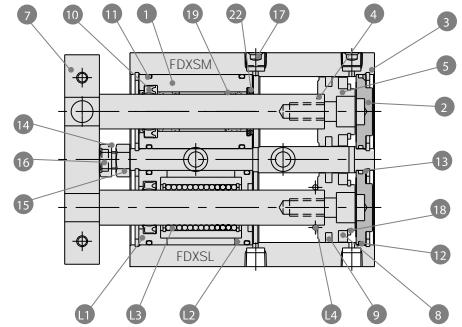

## Part lists

No.	Description	Material	Q'ty
1	Rod cover	Aluminum alloy	2
2	Head cover	Aluminum alloy	2
3	Housing	Aluminum alloy	1
4	Piston rod	303 Stainless steel	2
5	Piston	Aluminum alloy	2
6	Piston	Aluminum alloy	2
7	Tool plate	Aluminum alloy	1
8	Magnet	Rubber bonded barium ferrite	2
9	Piston seal	Nitrile - Buna N	2
10	Rod seal	Nitrile - Buna N	2
11	O-ring	Nitrile - Buna N	4
12	O-ring	Nitrile - Buna N	2
13	Snap ring	Plated steel	4

No.	Description	Material	Q'ty
14	Bumper bolt	Plated carbon steel	1
15	Hexagon nut	Plated carbon steel	1
16	Bumper	Polyurethane	1
17	Plug	Plated carbon steel	2
18	Bumper	Acetal	2
19	Bush	—	4
20	O-ring	Nitrile - Buna N	2
21	Bumper	Acetal	2
22	Bumper	Polyurethane	2
L1	Bearing retainer	Aluminum alloy	2
L2	Bearing retainer	Aluminum alloy	2
L3	Ball bearing	—	2
L4	O-ring	Nitrile - Buna N	2



## Weights

kg (lb)

Model	Standard stroke (mm)							
	10	20	30	40	50	60	75	100
FDXSM10	0.15(0.33)	0.17(0.37)	0.19(0.41)	0.21(0.46)	0.23(0.50)	0.25(0.55)	0.28(0.61)	0.33(0.72)
FDXSL10	0.15(0.33)	0.17(0.37)	0.19(0.41)	0.21(0.46)	0.23(0.50)	0.25(0.55)	0.28(0.61)	0.33(0.72)
FDXSM16	0.25(0.55)	0.28(0.61)	0.30(0.66)	0.33(0.72)	0.36(0.79)	0.39(0.86)	0.435(0.96)	0.51(1.12)
FDXSL16	0.27(0.59)	0.30(0.66)	0.32(0.70)	0.35(0.77)	0.38(0.83)	0.41(0.90)	0.435(0.96)	0.53(1.17)
FDXSM20	0.40(0.88)	0.44(0.97)	0.48(1.05)	0.51(1.12)	0.55(1.21)	0.585(1.29)	0.65(1.43)	0.74(1.63)
FDXSL20	0.43(0.95)	0.46(1.01)	0.50(1.10)	0.53(1.17)	0.57(1.25)	0.605(1.33)	0.66(1.45)	0.75(1.65)
FDXSM25	0.61(1.34)	0.66(1.45)	0.72(1.58)	0.77(1.69)	0.83(1.83)	0.89(1.96)	0.97(2.14)	1.10(2.42)
FDXSL25	0.62(1.36)	0.67(1.47)	0.73(1.60)	0.78(1.71)	0.84(1.85)	0.895(1.97)	0.98(2.16)	1.11(2.44)
FDXSM32	1.15(2.53)	1.23(2.71)	1.32(2.91)	1.40(3.08)	1.49(3.28)	1.58(3.48)	1.71(3.77)	1.93(4.25)
FDXSL32	1.16(2.55)	1.25(2.75)	1.34(2.95)	1.42(3.13)	1.51(3.33)	1.595(3.51)	1.72(3.79)	1.94(4.27)

# FDXS Series TWIN-ROD CYLINDER

## How to order

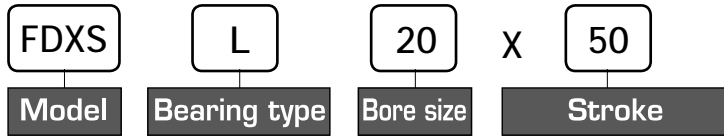

ø 10
ø 16
ø 20
ø 25
ø 32

Please select strokes from the attached table	Model	Standard Strokes (mm)							Long stroke (mm)					
		10	20	30	40	50	60	75	100	125	150	175	200	
	FDXS□10	●	●	●	●	●	●	●	●					
	FDXS□16	●	●	●	●	●	●	●	●	※	※			
	FDXS□20	●	●	●	●	●	●	●	●	※	※	※	※	
	FDXS□25	●	●	●	●	●	●	●	●	※	※	※	※	
	FDXS□32	●	●	●	●	●	●	●	●	※	※	※	※	



「●」 Standard Stroke 「※」 For long or custom strokes, consult factory.

## Price Lists

TYPE	Cylinder Stroke (mm)								
	10	20	30	40	50	60	75	100	
Sleeve bearing	FDXSM 10 x □	\$ 60.00	\$ 61.90	\$63.75	\$ 65.65	\$ 67.50	\$ 71.25	\$ 73.15	\$ 80.65
	FDXSM 16 x □	66.60	68.45	70.35	72.20	74.10	75.95	77.85	87.20
	FDXSM 20 x □	75.95	77.85	79.70	81.55	83.45	85.35	88.15	93.75
	FDXSM 25 x □	89.10	90.00	92.85	94.70	100.35	103.15	109.70	119.10
	FDXSM 32 x □	104.10	106.90	113.45	116.25	118.15	120.95	124.70	132.20
Ball bearing	FDXSL 10 x □	87.20	89.10	90.95	92.85	94.70	97.50	103.15	108.75
	FDXSL 16 x □	105.95	107.85	110.65	112.50	114.40	117.20	120.00	124.70
	FDXSL 20 x □	115.35	117.20	119.10	122.85	124.70	127.50	131.25	137.85
	FDXSL 25 x □	121.90	124.70	128.45	131.25	134.10	137.85	143.45	150.00
	FDXSL 32 x □	152.85	154.70	158.45	162.20	165.95	169.70	174.40	182.25

## Position Sensors

See specifications in the sensor selection guides below. Please order sensors and female cordsets separately from the charts below.

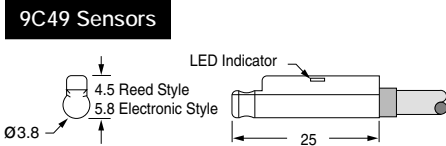

All 9C49 sensors feature surge protection, polarity protection, LED indicator, and extremely fast switching speeds

Female Cord Sets	Part No.	Price
1 Meter	CFC-1M	\$14.35
2 Meters	CFC-2M	16.05
5 Meters	CFC-5M	20.30

6.3 mm wide	9G49 Sensor Selection Guide for all bore sizes ø10 ~ ø32		Prewired 9 ft. Leadwire		Quick Disconnect*	
	Sensor Type	Electrical Characteristics	Part No.	Price	Part No.	Price
	Reed (LED)	5-120 VDC/VAC, 0.03 Amp max, 0.005 AMP min, 4 Watt max., 2.0 voltage drop	9G49-000-002 . . .	\$14.00	9G49-000-302 . . .	\$16.50
	Electronic (LED)	Sourcing PNP 5-28 VDC, 0.20 Amp max current, 0.5 voltage drop	9G49-000-031 . . .	27.45	9G49-000-331 . . .	29.95
Electronic (LED)	Sinking NPN 5-28 VDC, 0.20 Amp max current, 0.5 voltage drop	9G49-000-032 . . .	27.45	9G49-000-332 . . .	29.95	

4 mm round	9C49 Sensor Selection Guide for bore sizes ø20 ~ ø32		Prewired 9 ft. Leadwire		Quick Disconnect*	
	Sensor Type	Electrical Characteristics	Part No.	Price	Part No.	Price
	Reed (LED)	5-120 VDC/VAC, 0.04 Amp max, 0.005 Amp min current, 4 Watt max., 2.5 voltage drop	9C49-000-002 . . .	\$19.30	9C49-000-302 . . .	\$25.70
	Electronic (LED)	Sourcing PNP 6-30 VDC, 0.2 Amp max current, 6 Watt max., 1.5 voltage drop	9C49-000-031 . . .	27.30	9C49-000-331 . . .	31.65
Electronic (LED)	Sinking NPN 6-30 VDC, 0.2 Amp max current, 6 Watt max., 1.5 voltage drop	9C49-000-032 . . .	27.30	9C49-000-332 . . .	31.65	

\*Note: All quick disconnect style sensors are supplied with 6 inch pigtail with male connector.

**Model Selection**

**⚠ Caution** Theoretical output must be confirmed separately, referring to the tables and graphs below.

**● Vertical mounting**

Mounting orientation					
Max. speed - mm/sec (in/sec)		200 (7.9 in/s)	400 (15.8 in/s)	600 (23.6 in/s)	700 (27.6 in/s) 800 (31.6 in/s)
Stroke(mm)		All strokes			
Selection graph	ø10	<b>(A)</b>	<b>(B)</b>	<b>(C)</b>	<b>(D)</b>
	ø16				
	ø20				
	ø25				
	ø32				
600 mm/s max. for ø25 & ø32					

**● Vertical mounting ø10~ø32**





**(A)** V = 200 mm/sec (7.9 in/sec)

**(B)** V = 400 mm/sec (15.8 in/sec)

**(C)** V = 600 mm/sec (23.6 in/sec)

**(D)** V = 700 mm/sec (27.6 in/sec)

[ø10: V = 800 mm/sec (31.6 in/sec)]

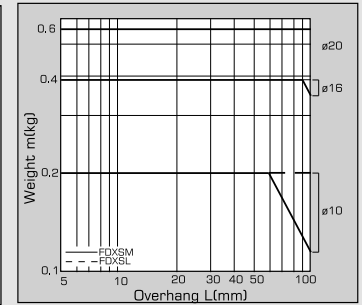





**● Horizontal mounting ø10~ø32 (400 mm/sec = 15.8 in/sec)**

**(E)** V = 400 mm/sec: 10 stroke

**(F)** V = over 400 mm/sec: 10 stroke

**(G)** V = 400 mm/sec: 30 stroke max.



**(H)** V = over 400 mm/sec: 30 stroke max.

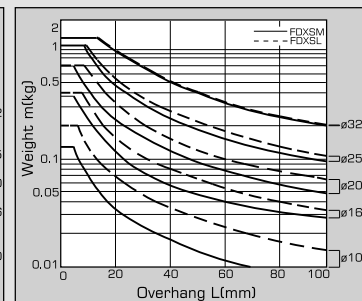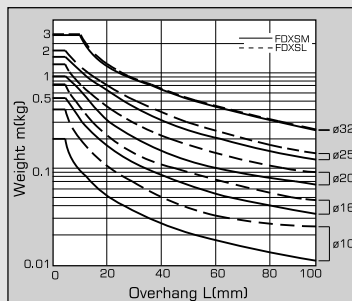

## Model Selection

**⚠ Caution** Theoretical output must be confirmed separately, referring to the tables below.

### ● Horizontal mounting

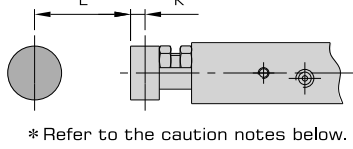Mounting orientation	Case 1				Case 2					
										
Stroke (mm)	10		Under 30		Under 50		Under 75		Under 100	
Max. speed (mm/s) (400mm/sec. = 15.9 in/sec.)	400	400 Over	400	400 Over	400	400 Over	400	400 Over	400	400 Over
Selection graph	ø10	<b>(E)</b> See graph page 4	<b>(F)</b> See graph page 4	<b>(G)</b> See graph page 4	<b>(H)</b> See graph page 4	<b>(I)</b> See graph below	<b>(J)</b> See graph below	<b>(K)</b> See graph below	<b>(L)</b> See graph below	
	ø16									
	ø20									
	ø25									
	ø32									

\* Refer to the caution notes below.

\*The maximum speed for ø10 to ø32 are : ø10 : 800 mm/s ; ø16 · ø20 : 700 mm/s ; ø25 · ø32 : 600 mm/s


### ⚠ Caution for Case 2

\*If the cylinder is horizontally mounted and the tool plate end does not reach the load's center of gravity, use the formula below to calculate the effective length L' that includes the distance between the load's center of gravity and the tool plate midplane. Select the graph that corresponds to the effective length L'.

**Effective length L' = (stroke) + K + L.**

Bore size	K
ø10	4 mm
ø16	5 mm
ø20	6 mm
ø25	
ø32	8 mm

K = Distance between the mid-plane and end of the tool plate.

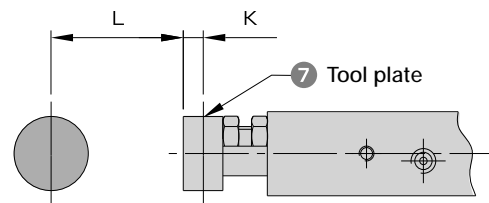

(Example)  
 When using FDXSM10x10 and L = 15mm: effective length L' = 10 + 4 + 15 = 29. Therefore, the graph used for your model selection should be the one for FDXSM10x30





### ● Horizontal mounting ø10~ø32 (400 mm/sec = 15.8 in/sec)

**(I)** V = 400 mm/sec: 50 stroke max.

**(J)** V = over 400 mm/sec: 50 stroke max.


**(K)** 75 stroke max.

**(L)** 100 stroke max.

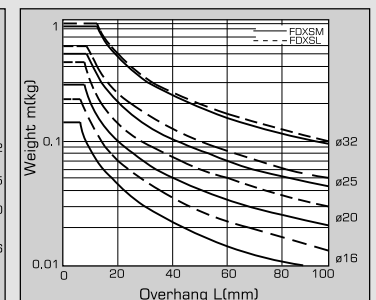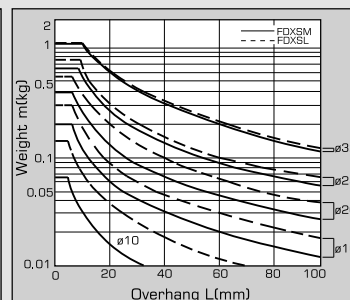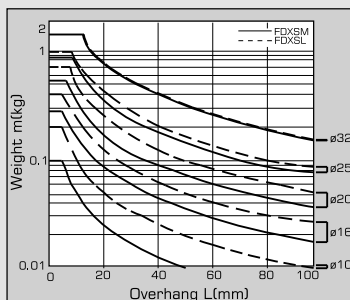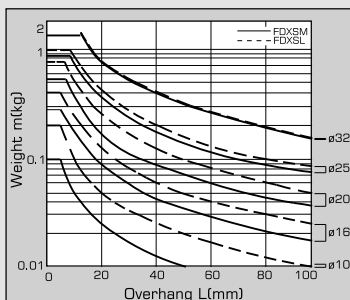

## External Dimensions (mm)

### FDXS□10~16

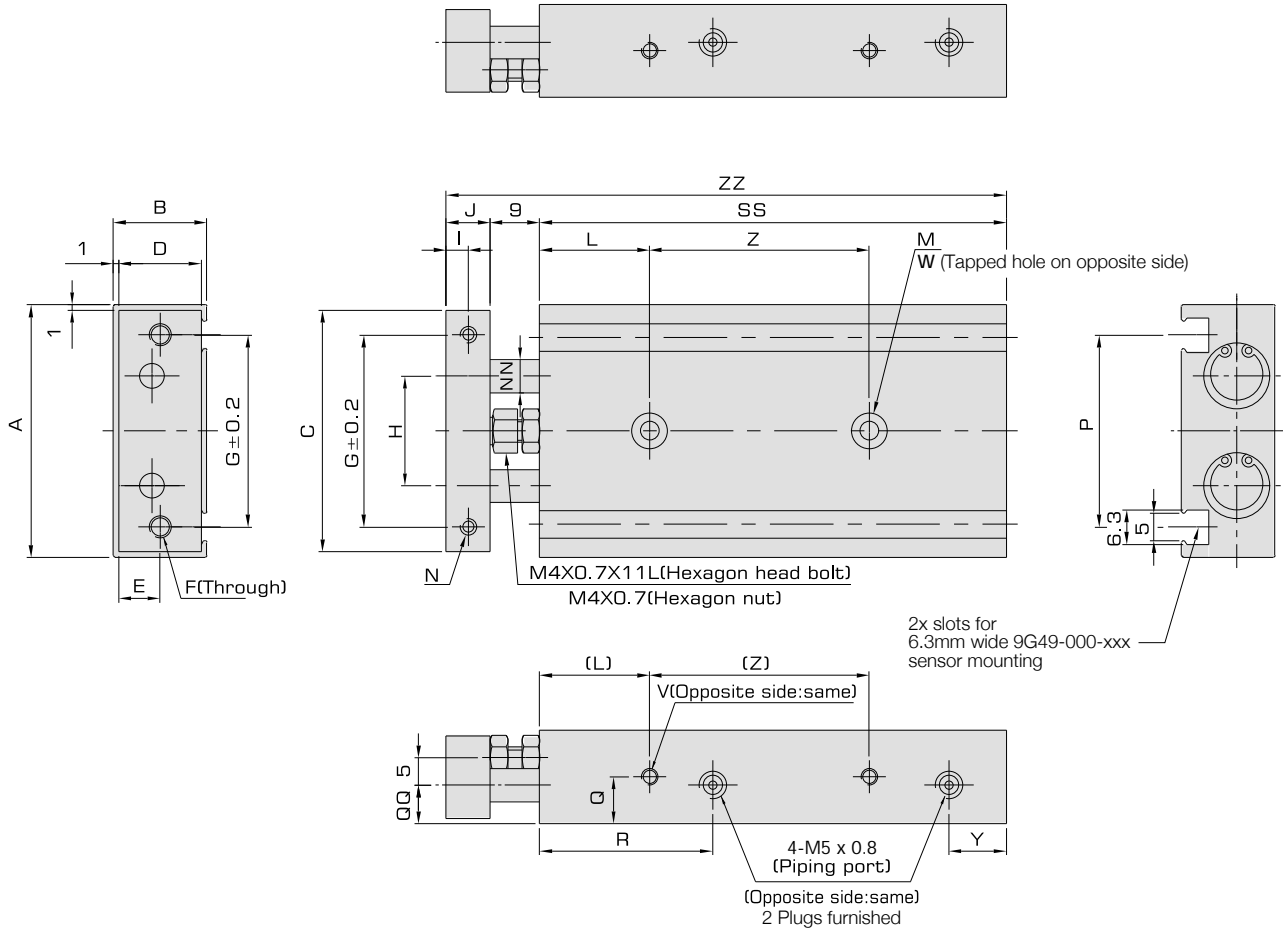


Model	A	B	C	D	E	F	G	H	I	J	L	M	N	NN	P	Q	QQ	R	V	W	Y
FDXS□10	46	17	44	15	7.5	2-M4X0.7	35	20	4	8	20	2- $\phi$ 3.4 through 2- $\phi$ 6.5 counterbore with depth 4	2-M3X0.5 dp. 5	$\phi$ 6	35	8.5	7	31.5	2-M3X0.5 dp. 4.5	2-M4X0.7	10.5
FDXS□16	58	20	56	18	9	2-M5X0.8	45	25	5	10	30	2- $\phi$ 4.3 through 2- $\phi$ 8 counterbore with depth 4.4	2-M4X0.7 dp. 6	$\phi$ 8	48	10	10	39.5	4-M4X0.7 dp. 5	2-M5X0.8	9

Stroke Model	SS								Z				ZZ									
	10	20	30	40	50	60	75	100	10、20	30、40、50	60、75	100	10	20	30	40	50	60	75	100		
FDXS□10	65	75	85	95	105	115	130	155	30	40	50	60	82	92	102	112	122	132	147	172		
FDXS□16	70	80	90	100	110	120	135	160	25	35	45	55	89	99	109	119	129	139	154	179		

# FDXS Series TWIN-ROD CYLINDER

## External Dimensions (mm)


FDXS□ 20~32

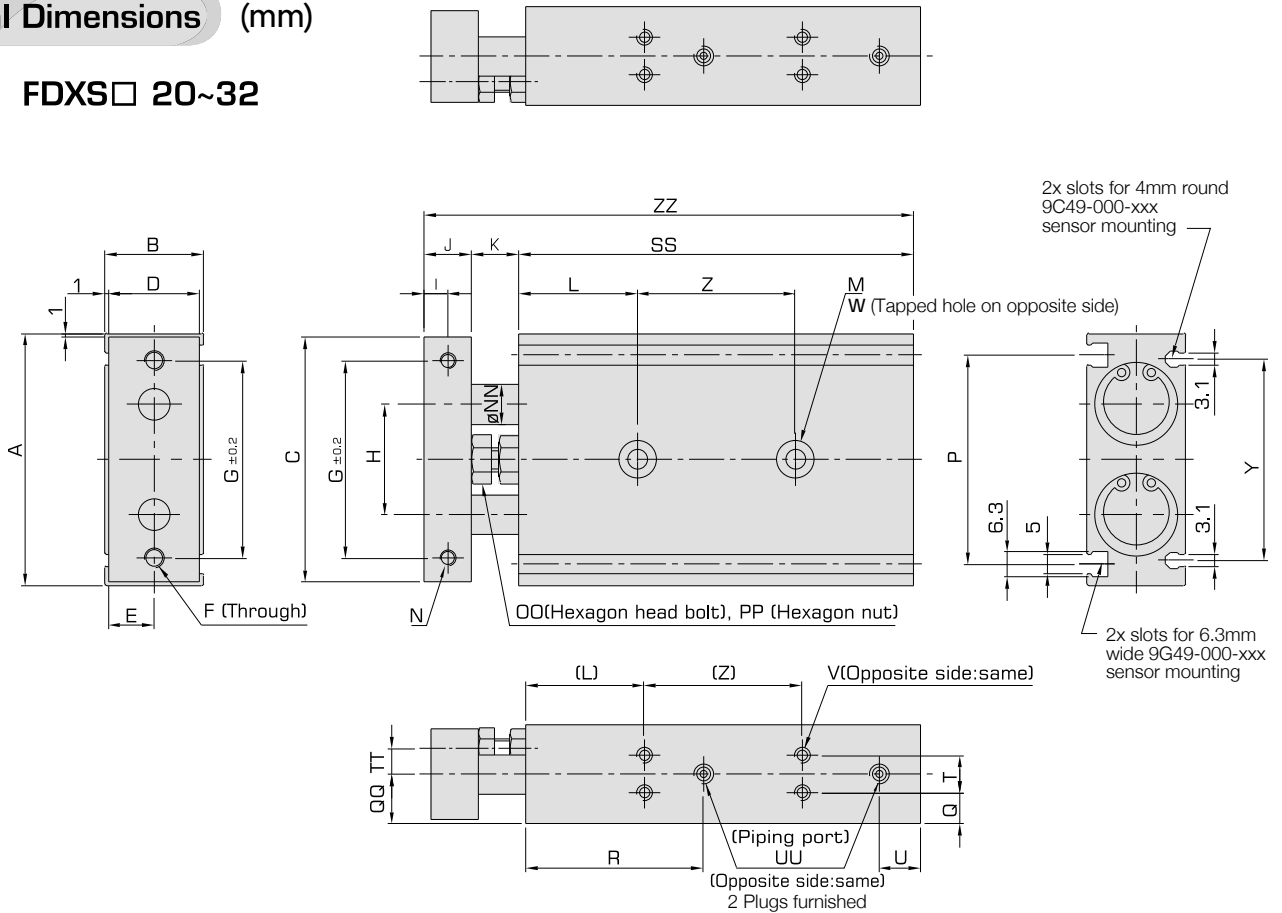


Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	NN	OO	P
FDXS□20	64	25	62	23	11.5	2-M5X0.8	50	28	6	12	12	30	2- $\phi$ 5.5 through 2- $\phi$ 9.5 counterbore , dp. 5.5	2-M4X0.7 dp. 6	$\phi$ 10	M6X1.0	53
FDXS□25	80	30	78	28	14	2-M6X1.0	60	35	6	12	12	30	2- $\phi$ 6.9 through 2- $\phi$ 11 counterbore , dp. 6.3	2-M5X0.8 dp. 7.5	$\phi$ 12	M6X1.0	64
FDXS□32	98	38	96	36	18	2-M6X1.0	75	44	8	16	14	30	2- $\phi$ 6.9 through 2- $\phi$ 11 counterbore , dp. 6.3	2-M5X0.8 dp. 8	$\phi$ 16	M8X1.25	76

Model	PP	Q	QQ	R	T	TT	U	UU	V	W	Y
FDXS□20	M6X1.0	7.75	12.5	45	9.5	6.5	10.5	4-M5X0.8dp. 4.5	8-M4X0.7dp. 5.5	2-M6X1.0	51
FDXS□25	M6X1.0	8.5	15	48	13	9	10	4-PT1/8"dp. 6.5	8-M5X0.8 dp. 7.5	2-M8X1.25	62
FDXS□32	M8X1.25	9	19	57.5	20	11.5	10.5	4-PT1/8"dp. 6.5	8-M5X0.8dp. 8	2-M8X1.25	74

Stroke	SS									Z			ZZ						
	10	20	30	40	50	60	75	100	10、20	30、40、50	60、75、100	10	20	30	40	50	60	75	100
FDXS□20	80	90	100	110	120	130	145	170	30	40	60	104	114	124	134	144	154	169	194
FDXS□25	82	92	102	112	122	132	147	172	30	40	60	106	116	126	136	146	156	171	196
FDXS□32	92	102	112	122	132	142	157	182	40	50	70	122	132	142	152	162	172	187	212



*Cylinders, Valves and Accessories  
 Catalog # CV9*



*Pancake® II Air Cylinders  
 Catalog # Pan2-2*




*Square Pancake® II Air Cylinders  
 Catalog # SqPan2*



*Multi-Power® Air Presses  
 Catalog # FP16*




*Linear Slides - 6 Families  
 Catalog # LS-03*



*Pneumatic Grippers  
 Parallel Jaw and Angular Motion - Catalog # GR-8*



*NFPA Interchangeable Air Cylinders - Catalog # NF-6*



*Global Series™ Metric Air Cylinders - Catalog # GC-15*



*Swing Clamps  
 Bulletin # SC-DB04*



*Modular Air Preparation System - FRLs  
 Catalog # FRL-06*



*Specialty & Control Valves  
 Catalog # 14CAN*



*Stopper Cylinders  
 Catalog # ST-SC*

**Check out these new product lines today !**



*ISO 6431 Cylinders  
 Catalog # FAOR-09*



*Pneumatic Angular Motion Grippers  
 Catalog # FKA-09*




*ISO 6432 Cylinders  
 Catalog # FAE-09*




*Rotary Actuators, Pneumatic  
 Catalog # FRA.C-09*



*Manifold Solenoid Valves  
 Catalog # FVS.Y-09*



*Air Pilot & Solenoid Valves  
 Catalog # FVA.E-09*



*Stainless Steel Body Air Cylinders  
 Catalog # SSB-03*



*Pneumatic & Hydraulic Swing Clamps  
 Catalog # FML.H*